

4

3


DWG NO.	LM522-1	SH	1	REV.	N/C
---------	---------	----	---	------	-----

1

This print and associated documents and the contained information are the confidential property of ELECTRONIC CABLE SPECIALISTS. Disclosure of, and/or reproduction of, all of part thereof or manufacture of any part from information contained on this print not specifically permitted by ELECTRONIC CABLE SPECIALISTS in writing is forbidden.

INSTALLATION INSTRUCTIONS

1. BEGIN BY CUTTING THE CABLE OFF SQUARE.




2. STRIP THE CABLE AS SHOWN, BEGINNING WITH L1 AND ENDING WITH L2. TAKE CARE NOT TO NICK THE CONDUCTORS WHILE STRIPPING THE DIELECTRIC AND JACKET. THE USE OF A STRIPPER DESIGNED FOR COAXIAL CABLE IS RECOMMENDED.



3. SLIDE THE FERRULE AND ADHESIVE SHRINK TUBING OVER THE END OF THE CABLE.




4. USING TWEEZERS, FOLD THE OUTER BRAID BACK OVER THE CABLE JACKET, LEAVING AS MUCH WEAVE AS POSSIBLE.



5. SLIT FOIL LONGITUDINALLY AND FOLD BACK OVER THE OTHER SHIELD.




6. REMOVE THE DIELECTRIC FROM THE CENTER CONDUCTOR BACK .60 INCHES FROM THE END OF THE CENTER CONDUCTOR. BE CAREFUL NOT TO NICK THE CENTER CONDUCTOR. THERMAL STRIPPERS ARE RECOMMENDED.



7. INSTALL DIELECTRIC STIFFENER OVER CENTER CONDUCTOR, ENSURING THAT IT IS BUTTED AGAINST THE CABLE DIELECTRIC.




8. ENSURE THAT THE CONTACT IS BUTTED AGAINST THE DIELECTRIC STIFFENER. TERMINATE CONTACT PER OPTION a OR b BELOW.
- a) SOLDER CONTACT ONTO CENTER CONDUCTOR, PER MIL-STD-2000, USING 63Sn/37Pb SOLDER. CLEAN FLUX RESIDUE USING APPROPRIATE CLEANER.
- b) CRIMP CONTACT ONTO CENTER CONDUCTOR USING A M22520/5-09 DIE (B HEX). IN A M22520/5-01 TOOL FRAME.



REVISIONS					
ECN	ZONE	REV.	DESCRIPTION	DATE	APPROVED
13939		N/C	NEW RELEASE	7/6/01	Shelby/Kennell

9. SLIDE THE BODY OF THE CONNECTOR OVER THE END OF THE CONTACT UNTIL THE NOTCH IN THE CONTACT SEATS WITH THE DIELECTRIC RIDGE INSIDE THE CONNECTOR.


CAUTION: PUSH CABLE INTO THE CONNECTOR STRAIGHT TO AVOID KINKING THE CABLE.



10. FOLD BOTH SHIELDS BACK OVER THE NECK OF THE CONNECTOR BODY.



11. SLIDE THE FERRULE UP OVER THE SHIELDS AND AGAINST THE CONNECTOR BODY. TRIM AWAY ANY EXCESS BRAID. CRIMP THE FERRULE ONCE, NEXT TO THE BODY, USING A M22520/5-09 DIE (A HEX) IN A M22520/5-01 TOOL FRAME. APPLY ADHESIVE HEAT SHRINK.



NOTES

- 1 ENSURE HEAT SHRINK IS INSTALLED PRIOR TO CRIMPING CONNECTOR.
- 2 ADHESIVE HEAT SHRINK SHOULD BE APPLIED IN ACCORDANCE WITH ECS WORK INSTRUCTION WI007. CONTACT ECS FOR A COPY OF THIS WORK INSTRUCTION.
- 3 CONNECTOR DIMENSIONS ARE FOR REFERENCE ONLY.

ALL LENGTHS IN INCHES

APPROVALS	DATE
DRAWN BY: P. PHALPHOUVONG	06/11/01
CHECKED BY: C. Chapman	7/6/01
DESIGNED BY:	
PROJECT ENG:	
ENGR. MGR: Shelby/Kennell	7/6/01

ELECTRONIC CABLE SPECIALISTS
FRANKLIN, WI 53132
PHONE: (414) 421-5300


TITLE: CUSTOMER SPECIFICATION

SIZE 1, ARINC 404 RF CONNECTOR
FOR ECS CABLE 432101 AND 532101

SIZE CAGE CODE LEVEL PART NO.
B 66197

LM522

SCALE: FILE NO. F:\ECSPEC\CONN\INST\LM522-1-1 SHEET: 1 OF 2

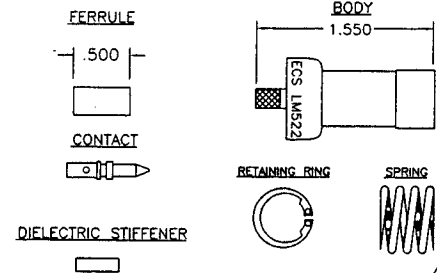

SPECIFICATIONS

ELECTRICAL

IMPEDANCE: 50 OHMS NOMINAL
FREQUENCY RANGE: 0-6 GHz
VSWR: 1.70:1 MAXIMUM
INSERTION LOSS: 0.3 dB @ 6 GHz
DIELECTRIC WITHSTANDING: 2500 VRMS @ SEA LEVEL
WORKING VOLTAGE: 1000 VRMS @ SEA LEVEL
INSULATION RESISTANCE: 5000 MEGOHMS MINIMUM
@ 500 VOLTS DC

MECHANICAL

MECHANICAL INTERFACE PER ARINC SPEC 600
FIGURE 19-54.2
TERMINATION STYLE: INNER CONTACT-SOLDER OR CRIMP
OUTER CONTACT-FERRULE CRIMP
CABLE RETENTION: 20 LBS

ENVIRONMENTAL

TEMPERATURE RATING: -65° TO +200°
VIBRATION: MIL-STD-202, METHOD 204, COND. B
SHOCK: MIL-STD-202, METHOD 213, COND. 1
THERMAL SHOCK: MIL-STD-202, METHOD 107, COND. B
CORROSION: MIL-STD-202, METHOD 101, COND. B
MOISTURE RESISTANCE: MIL-STD-202, METHOD 106

MATERIALS

BODY: BRASS PER ASTM B16
FERRULE: ANNEALED BRASS PER ASTM B16
CABLE CONTACT: BRASS PER ASTM B16
CENTER CONTACT: BERYLLIUM COPPER PER ASTM B196
DIELECTRIC: TEFLON PER ASTM D1710

FINISHES

FERRULE: BRIGHT NICKEL PER QQ-N-290
BODY, CENTER CONTACT: GOLD PER MIL-G-45204

4

3

2

1