

ST02626CH

FAA Supplemental Type Certificate



Installation of ECS EZMount™ Mechanical Mounting Assemblies on Lower Frames of Cockpit Sliding Windows on Airbus Select A300 Series Aircraft (FAA STC ST02626CH)

OVERVIEW

- » FAA STC ST02626CH.
- » European Aviation Safety Agency (EASA) STC 03101.

INTRODUCTION

The STCs govern the installation of the EZMount™ mechanical mounting assemblies on lower frames of cockpit sliding windows in accordance with Electronic Cable Specialists (ECS) Master Data List ECS-206919.

YOUR NEEDS

Provides modernized EFB system mounting provisions for select Airbus A300 series aircraft.

YOUR BENEFITS

Incorporation of STC ST02626CH is required to support separate installation and operational approval of an EFB system in the cockpit. Once installed, the complete EFB system will provide flight crews the ability to interact with electronic maps, charts, and manuals in lieu of accessing standard paper documentation. System installation will reduce materials costs and aircraft weight without compromising ergonomic concerns.

STC AIRCRAFT EFFECTIVITY

- » Airbus A318-111/-112/-121/-122 series aircraft.
- » Airbus A319-111/-112/-113/-114/-115/-131/-132/-133 series aircraft.
- » Airbus A320-111/-211/-212/-214/-231/-232/-233 series aircraft.
- » Airbus A321-111/-112/-131/-211/-212/-213/-231/-232 series aircraft.

STC LIMITATIONS

- » None

Contact CarlisleIT for usage rights, derivative configurations, and installation lead time (800) 327-9473 • sales@carlisleit.com

STC CONFIGURATIONS

- » Configuration 1: Installation of two EZMount™ Tilt mounting assemblies on lower window frame of captain's and first officer's side of cockpit sliding windows.
- » Configuration 2: Installation of two EZMount™ Slider mounting assemblies on lower window frame of captain's and first officer's side of cockpit sliding windows.
- » Configuration 3: Installation of two EZMount™ Pivot mounting assemblies on lower window frame of captain's and first officer's side of cockpit sliding windows.

PRODUCT DESCRIPTION

- » Three versions of the EZMount™ mounting arms used for EFB display units are available for installation:
 - EZMount™ Tilt – refer to Configuration 1 for additional details.
 - EZMount™ Slider – refer to Configuration 2 for additional details.
 - EZMount™ Pivot – refer to Configuration 3 for additional details.
- » Each mounting arm can be installed on the captain's and first officer's side window trims.

ELECTRICAL CHANGES

Configuration 1, 2 and 3

- » No new wires are added and no existing wires are modified or relocated.

ST02626CH

FAA Supplemental Type Certificate

MECHANICAL CHANGES

Configuration 1

- » Modification to the existing captain's side window trim by adding four (4) holes to allow spacers to contact the mounting brackets under window trim, which is attached to the window frame. The mounting plate and EZMount™ tilt is then installed on the top surface of the spacers. See Figure 1.
- » Modification to the existing first officer's side window trim and installation of EZMount™ Tilt will be a mirror image of the modification implemented on the captain's side.

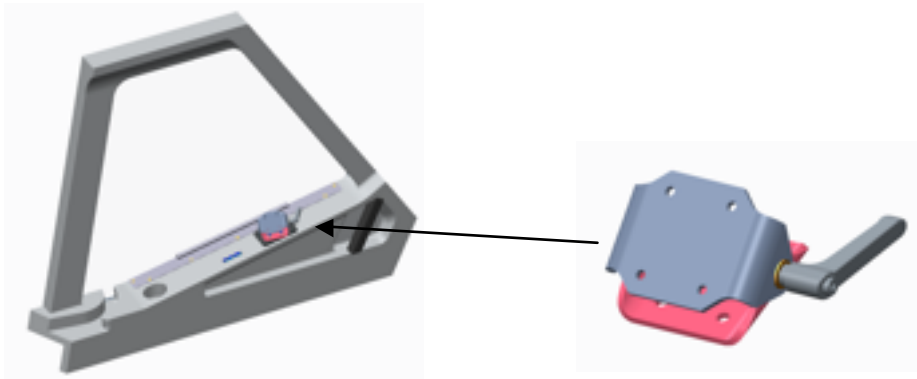


FIGURE 1 - CAPTAIN'S SIDE WINDOW MODIFIED WITH EZMOUNT™ TILT
(FIRST OFFICER'S INSTALLATION IS MIRROR IMAGE)

Configuration 2

- » Modification to the existing captain's side window trim by adding four (4) holes to allow spacers to contact the mounting brackets under window trim that are attached to the window frame. The mounting plate assembly and EZMount™ Slider is then installed on the top surface of the spacers. See Figure 2.
- » Modification to the existing first officer's side window trim and installation of EZMount™ Slider will be a mirror image of the modification implemented on the captain's side.



FIGURE 2 - CAPTAIN'S SIDE WINDOW MODIFIED WITH EZMOUNT™ SLIDER
(FIRST OFFICER'S INSTALLATION IS MIRROR IMAGE)

ST02626CH

FAA Supplemental Type Certificate

Configuration 3

- » Modification to the existing captain's side window trim by adding four (4) holes to allow spacers to contact the mounting brackets under window trim that are attached to the window frame. The mounting plate assembly and EZMount™ Pivot is then installed on the top surface of the spacers. See Figure 3.
- » Modification to the existing first officer's side window trim and installation of EZMount™ Pivot will be a mirror image of the modification implemented on the captain's side.

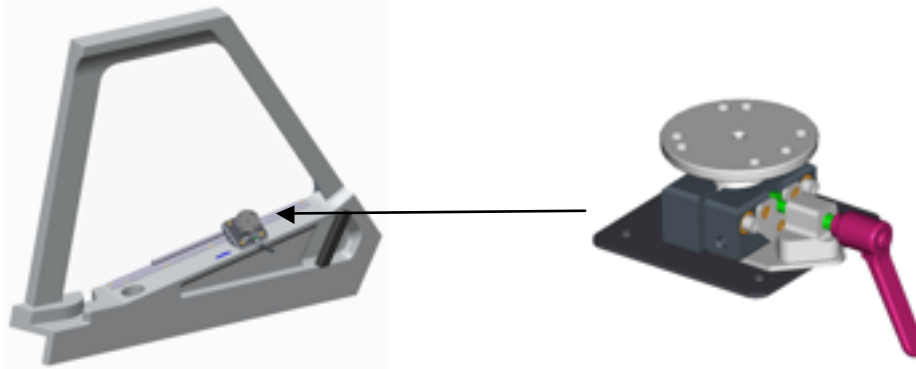


FIGURE 3 - CAPTAIN'S SIDE WINDOW MODIFIED WITH EZMOUNT™ PIVOT
(FIRST OFFICER'S INSTALLATION IS MIRROR IMAGE)

CONNECT WITH US TODAY

See CarlisleIT's line of **Certification Services** at:
[CarlisleIT.com/services/certification-stc-engineering](https://www.carlisleit.com/services/certification-stc-engineering)

(+1) 904-494-0549
Sales@CarlisleIT.com