


Semi-Rigid Coaxial Cables

P/N UT-141-SA-TP-M17 | 50 Ω Tin-Plated Copper Outer Conductor

INTRODUCTION

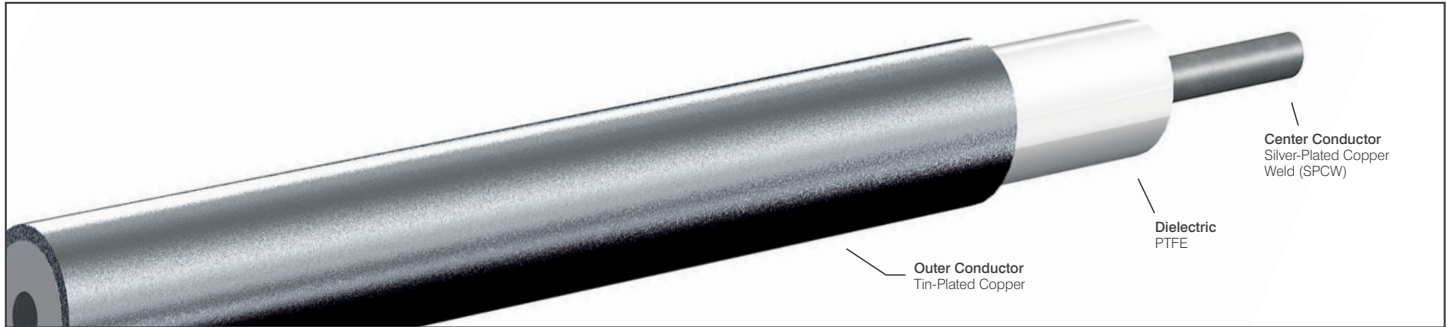

All of our 50 Ω copper semi-rigid cables feature low attenuation and VSWR covering the entire microwave spectrum. With numerous connector options available off-the-shelf, this family of cables is one of the most versatile available today. They meet the demands of package density and provide total shielding for elimination of signal loss and noise.

DIMENSIONS

DIMENSIONS		
Outer Conductor Diameter	in	0.141 + 0.002 /-0.001
	mm	3.581 + 0.051 /-0.025
Center Conductor Diameter	in	0.0362
	mm	0.9195
Length (Maximum)	Feet	20
	Meter	6.10

MATERIALS

Outer Conductor	Copper
Outer Conductor Plating	Tin
Dielectric	PTFE
Center Conductor	SPCW
RoHS Compliant	✓

MECHANICAL CHARACTERISTICS*

Outer Conductor Integrity Temp.	°C	175
Operating Temperature (Max)	°C	125
Inside Bend Radius (Minimum)	in	0.075
	mm	1.905
Weight	lbs / 100ft	3.29
	kg / 100m	4.94

* Applicable at room temperature. Contact factory for performance over temperature range.

ELECTRICAL CHARACTERISTICS*

Characteristic Impedance	ohm	50
Capacitance	pF / ft	29.0
	pF / m	95.2
Corona Extinction Voltage	VRMS @ 60 Hz	1900
Voltage Withstanding	VRMS @ 60 Hz	9600
Higher Order Mode Frequency	GHz	34.0
Attenuation (Db / 100 Ft Typical)	@ 0.5 GHz	7.6
	@ 1.0 GHz	11.3
	@ 5.0 GHz	27.6
	@ 10.0 GHz	41.6
	@ 18.0 GHz	59.6
	@ 26.5 GHz	76.2
	@ 40.0 GHz	N/A
	@ 50.0 GHz	N/A
	@ 90.0 GHz	N/A
Power (Watts Cw @ 20 °C, Maximum)	@ 0.5 GHz	483.5
	@ 1.0 GHz	336.2
	@ 5.0 GHz	140.4
	@ 10.0 GHz	94.6
	@ 18.0 GHz	66.8
	@ 26.5 GHz	52.7
	@ 40.0 GHz	N/A
	@ 50.0 GHz	N/A
	@ 90.0 GHz	N/A