


# Low-Loss Semi-Rigid Coaxial Cables

P/N UT-120-TP-LL | 50 Ω Tin-Plated Copper Outer Conductor

## INTRODUCTION

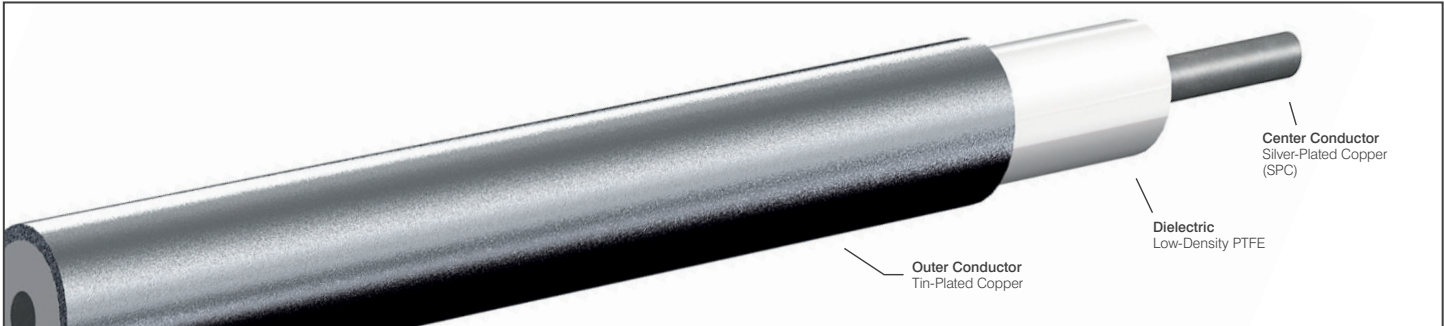

Low-loss semi-rigid cables provide lower attenuation, better phase stability with temperature, and a higher operating temperature compared to traditional solid PTFE semi-rigid cables.

Our low-loss semi-rigid cables are available with a copper, tin-plated copper, aluminum, or tin-plated aluminum outer conductor.

DIMENSIONS		
Outer Conductor Diameter	in	0.120 + 0.002 /-0.001
	mm	3.048 + 0.051 /-0.025
Center Conductor Diameter	in	0.0359
	mm	0.9119
Length (Maximum)	Feet	20
	Meter	6.10

MATERIALS	
Outer Conductor	Copper
Outer Conductor Plating	Tin
Dielectric	LD PTFE
Center Conductor	SPC
RoHS Compliant	✓

MECHANICAL CHARACTERISTICS*		
Outer Conductor Integrity Temp.	°C	225
Operating Temperature (Max)	°C	225
Inside Bend Radius (Minimum)	in	0.188
	mm	4.775
Weight	lbs / 100ft	2.01
	kg / 100m	3.02

\* Applicable at room temperature. Contact factory for performance over temperature range.

ELECTRICAL CHARACTERISTICS*		
Characteristic Impedance	ohm	50
Capacitance	pF / ft	26.5
	pF / m	86.8
Corona Extinction Voltage	VRMS @ 60 Hz	2600
Voltage Withstanding	VRMS @ 60 Hz	7800
Higher Order Mode Frequency	GHz	41.0
Attenuation (Db / 100 Ft Typical)	@ 0.5 GHz	7.7
	@ 1.0 GHz	11
	@ 5.0 GHz	25.3
	@ 10.0 GHz	36.4
	@ 18.0 GHz	50
	@ 26.5 GHz	61.8
	@ 40.0 GHz	77.7
	@ 50.0 GHz	N/A
	@ 90.0 GHz	N/A
Power (Watts Cw @ 20 °C, Maximum)	@ 0.5 GHz	564.8
	@ 1.0 GHz	397.5
	@ 5.0 GHz	174.3
	@ 10.0 GHz	121.4
	@ 18.0 GHz	89
	@ 26.5 GHz	72.3
	@ 40.0 GHz	57.8
	@ 50.0 GHz	N/A
	@ 90.0 GHz	N/A