

High-Speed Digital Data Cables

Gigabit, NETflight®, and Maxflite™ Series



Gigabit Series Ethernet Cables | NETflight® Series Ethernet Cables | Maxflite™ Series Cables

INTRODUCTION

We manufacture a wide variety of high-performance data cables designed to meet the needs of aerospace, defense, military, ground transportation, industrial, and RF communication applications like:

- » Ethernet Backbone
- » Avionics
- » High-Definition Video
- » Cabin Management Systems
- » In-Flight Entertainment
- » Bus

Gigabit Series Ethernet Cables have been developed in a wide variety of configurations to provide 1 and 10 Gb performance in the most demanding applications.

NETflight® Series Ethernet Cables in single pair, dual pair, and quadrx configurations are widely used throughout the aerospace industry and provide superior electrical and mechanical performance.

Maxflite™ Series cables provide high-speed performance for the popular video and data bus protocols:

- » HDMI
- » USB
- » DVI
- » Firewire

In addition to the standard protocols, we also offer:

- » Custom Designs
- » Assembly Services

FEATURES & BENEFITS

- » Exceptional electrical and mechanical performance
- » Operating performance from -55 °C to as high as 200 °C
- » Meets the requirements of aerospace and other harsh environments including FAR 25.853 flammability and Boeing/Airbus smoke and toxicity requirements
- » Multiple configurations to meet the needs of almost any application
- » Lightweight versions to address weight and space requirements
- » Advanced technologies, including bonded pairs and an innovative X-Web, reduce crosstalk and ensure installable performance


High-Speed Digital Data Cables

Gigabit Series

Gigabit Series	Gigabit-Flexx™		Gigabit-Plus™		Gigabit 10-HP™	Gigabit-10		Gigabit-STP™	
	24 AWG	26 AWG	24 AWG	26 AWG	24 AWG	24 AWG	26 AWG	26 AWG	
Part Number	MX10G-24FLX	MX10G-26FLX	MX10G-24	MX10G-26	MX10G-24HP	NF24GB100-10	NF26GB100-10	NF26-GBSTP-100	
Impedance	100 Ω		100 Ω		100 Ω	100 Ω		100 Ω	
DC Resistance @ 100 ft	2.76 Ω	4.38 Ω	2.76 Ω	4.38 Ω	2.76 Ω	2.43 Ω	4.38 Ω	4.38 Ω	
Velocity of Propagation	70%		70%		70%	77%		77%	
Attenuation @ 100 m	@ 100 MHz	26.4 dB	31.6 dB	24 dB	29 dB	22.0 dB	24.1 dB	27.2 dB	38 dB
	@ 250 MHz	N/A	N/A	40 dB	48 dB	32 dB	39.2 dB	44.3 dB	62 dB
	@ 500 MHz	N/A	N/A	N/A	N/A	48 dB	57.2 dB	64.6 dB	90.6 dB
Weight	35 lb/1000 ft (52 kg/1000 m)	28 lb/1000 ft (42 kg/1000 m)	50 lb/1000 ft (74 kg/1000 m)	35 lb/1000 ft (52 kg/1000 m)	55 lb/1000 ft (82 kg/1000 m)	45 lb/1000 ft (66.6 kg/1000 m)	33 lb/1000 ft (48.8 kg/1000 m)	50 lb/1000 ft (74 kg/1000 m)	
Size	0.245" (6.22 mm)	0.195" (4.95 mm)	0.270" (6.86 mm)	0.220" (5.59 mm)	0.290" (7.36 mm)	0.282" (7.16 mm)	0.232" (5.89 mm)	0.300" (7.62 mm)	
Min. Bend Radius	1" (25.4 mm)	0.75" (19.05 mm)	2" (50.8 mm)	1.75" (44.45 mm)	0.5" (12.7 mm)	2.82" (71.6 mm)	2.32" (58.9 mm)	3" (76.2 mm)	
Operating Temperature**	-55 to 200 °C		-55 to 150 °C		-55 to 150 °C	-55 to 150 °C		-55 to 150 °C	
ROHS Compliant	✓		✓		✓	✓		✓	
Meets FAR 25.853	✓		✓		✓	✓		✓	
Meets Boeing/Airbus Smoke and Toxicity	✓		✓		✓	✓		✓	

* 24773/1A042X-8(LD) and 26463/1A042X-8(LD) are cables designed specifically for use with an Octax® connector. **Available at -65 °C. Contact us for details.

GIGABIT SERIES CROSS SECTIONS

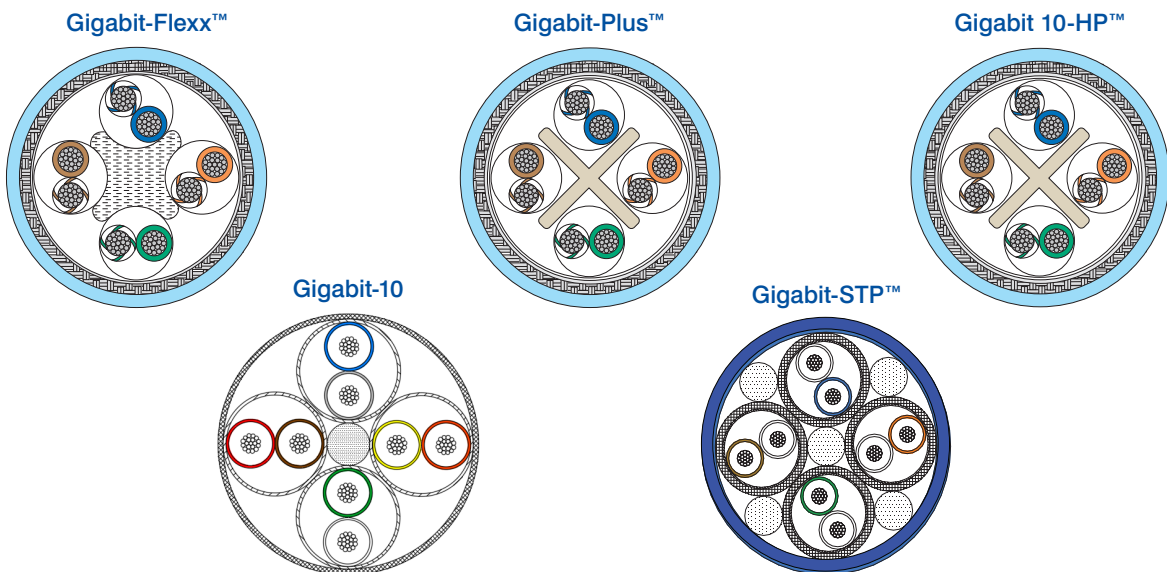

High-Speed Digital Data Cables


NETflight® Series

NETflight® Series	100 Base-T Shielded Twisted Pair		100 Base-T Shielded Quad				100 Base-T Single Twisted Pair			
	22 AWG	24 AWG	22 AWG	24 AWG		26 AWG	22 AWG	24 AWG	26 AWG	
Part Number	NF22P100	NF24P100	NF22Q100-01	NF24Q100-01	NF24Q100-01HP	NF24Q100-01-DL-ALW	NF26Q100-01	NF22T100	NF24T100	NF26T100
Impedance	100 Ω		100 Ω				100 Ω			
Velocity of Propagation	78%		78%				78%			
Attenuation @ 100 MHz	Nom: 5.6 dB/100 ft Max: 6.7 dB/100 ft	Nom: 6 dB/100 ft Max: 7.1 dB/100 ft	Nom: 6.4 dB/100 ft Max: 7.3 dB/100 ft	Nom: 8 dB/100 ft Max: 9.2 dB/100 ft	Nom: 8 dB/100 ft Max: 9.2 dB/100 ft	Nom: 8 dB/100 ft Max: 9.2 dB/100 ft	Nom: 9.3 dB/100 ft Max: 11 dB/100 ft	Nom: 5.8 dB/100 ft Max: 6.7 dB/100 ft	Nom: 6.6 dB/100 ft Max: 7.7 dB/100 ft	Nom: 8.5 dB/100 ft Max: 9.9 dB/100 ft
Nominal Weight	42 lbs/100 ft (63 kg/1000 m)	35 lbs/100 ft (51 kg/1000 m)	35 lbs/100 ft (51 kg/1000 m)	24.5 lbs/100 ft (37 kg/1000 m)	24.5 lbs/100 ft (36.4 kg/1000 m)	20.5 lbs/100 ft (30.5 kg/1000 m)	19 lbs/100 ft (28 kg/1000 m)	26 lbs/100 ft (38 kg/1000 m)	18.5 lbs/100 ft (28 kg/1000 m)	15.5 lbs/100 ft (23 kg/1000 m)
Nominal Size	0.195 x 0.306" (4.95 x 7.37 mm)	0.175 x 0.276" (4.45 x 7.01 mm)	0.190" (4.83 mm)	0.160" (4.06 mm)	0.160" (4.06 mm)	0.160" (4.06 mm)	0.137" (3.45 mm)	0.180" (4.57 mm)	0.145" (3.68 mm)	0.132" (3.35 mm)
Bend Radius	1.95" (49.5 mm)	1.75" (44.5 mm)	1.90" (48.3 mm)	1.60" (40.6 mm)	1.60" (40.6 mm)	1.60" (40.6 mm)	1.37" (34.5 mm)	1.80" (45.7 mm)	1.45" (36.8 mm)	1.32" (33.5 mm)
Operating Temperature**	-55 to 150 °C		-55 to 150 °C		-55 to 200 °C	-55 to 150 °C		-55 to 150 °C		
Meets FAR 25.853	✓		✓				✓			
Meets Boeing/Airbus Smoke & Toxicity	✓		✓				✓			


**Available at -65 °C. Contact us for details.

NETflight® SERIES CROSS SECTIONS


100 Base-T Shielded Twisted Pair

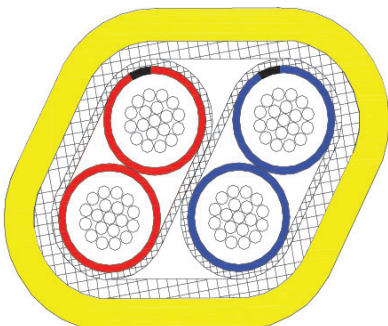

100 Base-T Shielded Quad



100 Base-T Single Twisted Pair




High-Speed Digital Data Cables

Maxflite™ Series

Maxflite™ Series	HDMI (1.3)	HDMI (2.0)	DVI	IEEE 1394 Firewire	USB 2.0 26/22 AWG	USB 3.0 24/26/22 AWG + Drain	USB 3.1
Part Number	1586-305	26453/1K017LX-15-DL	24463/05099X-8(LD)	24483/03063LX-6(LD)	NF26/22USB(A)	USB3.0/24(AM)	26443/1K016LX-16-DL
Nominal Impedance	100 Ω	100 Ω	100 Ω	110 Ω	90 Ω	90 Ω	90 Ω
Nominal Velocity of Propagation	70%	75%	75%	79%	70%	70%	75%
Nominal Attenuation	17 dB/100 ft @ 300 MHz	30 dB/100 ft @ 1 GHz	N/A	11 dB/100 ft @ 200 MHz	2 dB/5m @ 100 GHz	1.4 dB/m @ 1.25 GHz	4.9 dB/3m @ 1.25 GHz
	42 dB/100 ft @ 1.6 GHz	50 dB/100 ft @ 2 GHz		17 dB/100 ft @ 400 MHz	3.2 dB/5m @ 200 MHz	2.4 dB/m @ 2.5 GHz	6.9 dB/3m @ 2.5 GHz
	70 dB/100 ft @ 4.1 GHz	70 dB/100 ft @ 3 GHz		24 dB/100 ft @ 800 MHz	5.8 dB/5m @ 400 MHz	4.1 dB/3m @ 5 GHz	10.8 dB/3m @ 5 GHz
Nominal Weight	72 lbs/1000 ft (107 kg/1000 m)	64 lbs/1000 ft (95.1 kg/1000 m)	105 lbs/1000 ft (156 kg/1000 m)	78 lbs/1000 ft (116 kg/1000 m)	19 lbs/1000 ft (28 kg/1000 m)	50 lbs/1000 ft (74.41 kg/1000 m)	73 lbs/1000 ft (108.8 kg/1000 m)
Nominal Diameter	0.315" (8 mm)	0.295" (7.49 mm)	0.4" (10.16 mm)	0.34" (8.64 mm)	0.133" (3.4 mm)	0.27" (6.8 mm)	0.295" (7.49 mm)
Min. Bend Radius	1.89" (48 mm)	1.5" (38.1 mm)	4" (102 mm)	3.4" (86 mm)	1.3" (33 mm)	2.7" (68.6 mm)	1.5" (38.1 mm)
Operating Temperature**	-55 to 150 °C	-55 to 135 °C	-55 to 150 °C	-55 to 150 °C	-55 to 150 °C	-55 to 150 °C	-55 to 200 °C
Meets FAR 25.853	✓	✓	✓	✓	✓	✓	✓
Meets Boeing/Airbus Smoke & Toxicity	✓	✓	✓	✓	✓	✓	✓

**Available at -65 °C. Contact us for details.

Maxflite™ SERIES CROSS SECTIONS

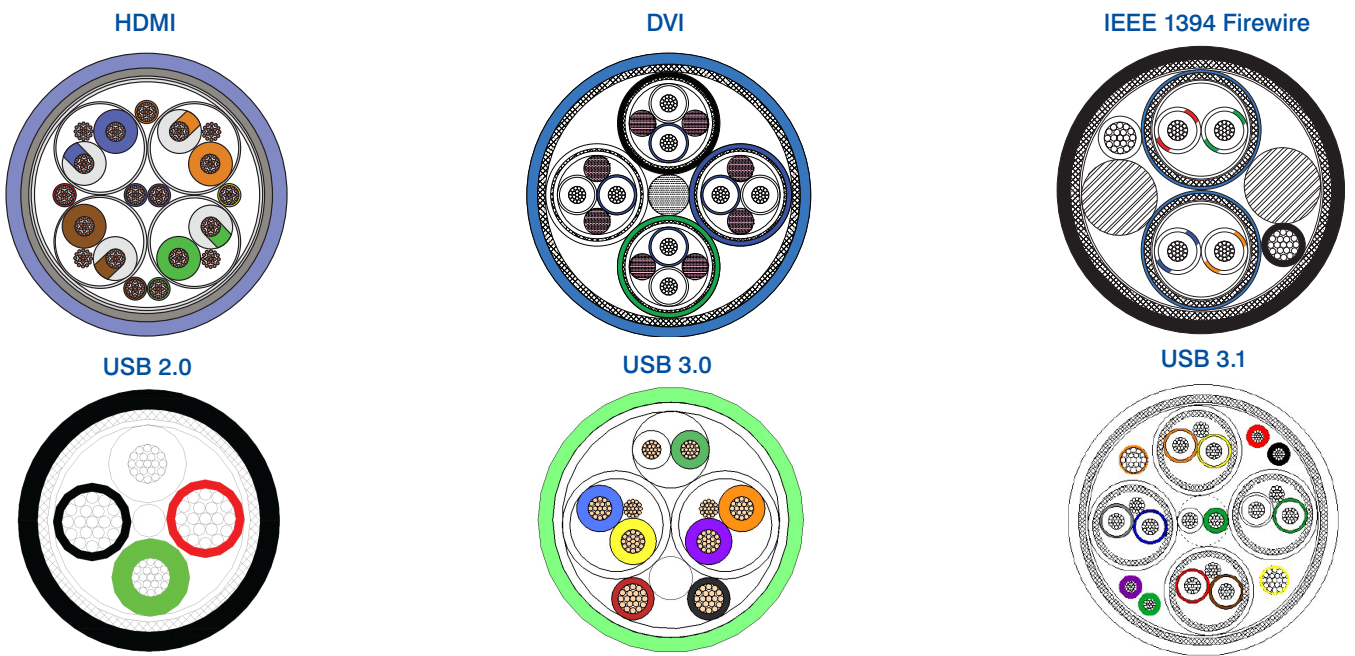

See CarlisleIT's line of High-Speed Digital Data Cables at:
CarlisleIT.com/products/wire-cable/high-speed-digital-data-cables/

+1 (800) 458.9960
 Sales@CarlisleIT.com